



FIBER FILM ALPHA-L

MINIMISE YOUR COST PER PALLET

FIBER FILM ALPHA-L

Product Overview

Fiber Film is a novel, high efficiency stretch film with reinforcement elements (fibers) that increase tear resistance.


Fiber Film **Alpha-L** operates with **Semi-Automatic Wrapping Machines** with **Brake Tension System**.

Fiber Film **Alpha-L** is designed for **Light** applications and usually **replaces a stretch film of 17µm thickness or less**.

Alpha-L is applied to various load types providing:

- ✓ **Worry free performance: Place it–Forget it!**
- ✓ **No breakages during palletization**
- ✓ **Exceptional load retention & stability**

**Fiber Film Alpha-L
Performance Chart**

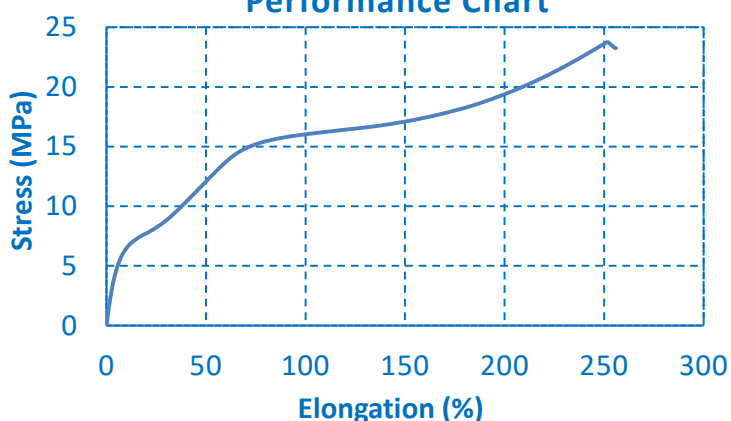

The graph above illustrates how the film performs under an increased load. Where the line ends indicates where the film breaks.

Technical Specifications

		TOLERANCE
Tensile strength at break (N/mm ²)	30,7	10%
Elongation at break (%)	256	10%
Film width (mm)	485	2%
Film Weight (gr/m)	4,5	5%

Pallet dimensions: 80cm x 120cm x 115cm

Packaging Specifications

Gross Roll Weight* (kg)	12,5
Film Length per roll** (m)	2400
Roll Diameter (O.D.)*** mm	228
Core diameter (mm)	76
Core Weight (kg)	1,7
Rolls per pallet	36
Net Pallet Weight *(kg)	450
Weight Tolerance*	±5%
Length Tolerance**	±2%
Roll diameter Tolerance***	±2%

V. 10_2017



VENETA IMBALLAGGI
PROTEGGE I TUOI PRODOTTI